


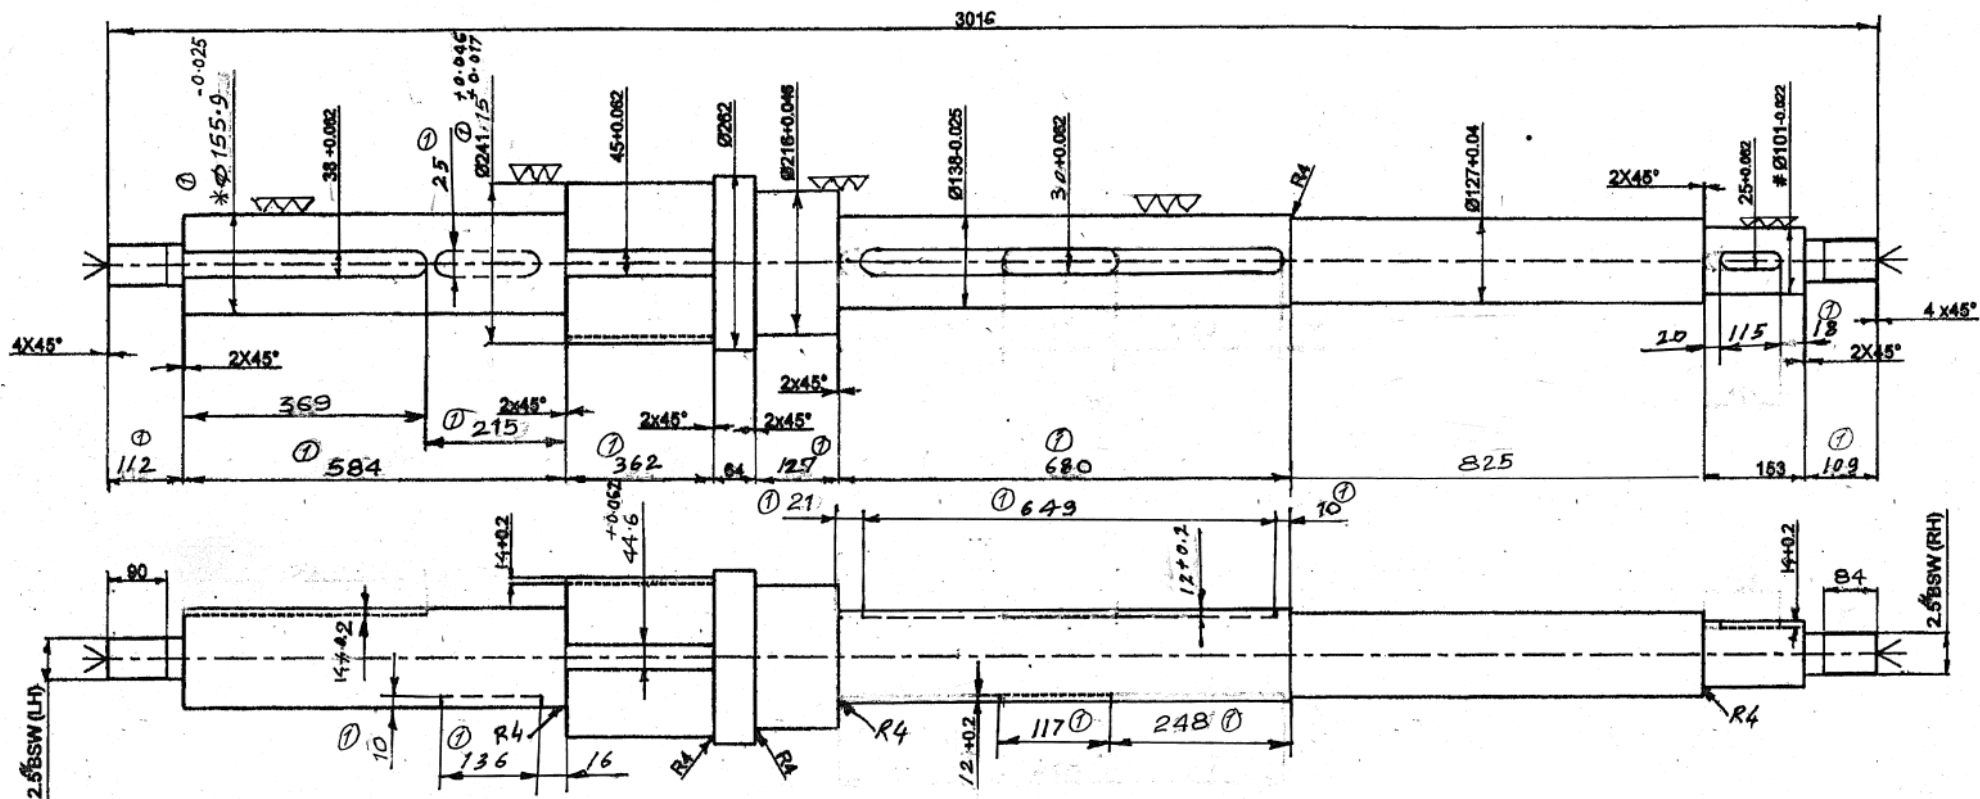

DRAWN AS PER SAMPLE

MATERIAL:-) 45 C8 (IS:1570 PART-2 SEC1-1979)

NOTE :-

1. ALL DIMENSIONS ARE IN mm
UNLESS STATED.
2. SHARP EDGES TO BE REMOVED
3. ∇ = SMOOTH, $\nabla \nabla$ = FINE FINISH
4. DIMS. MKD.# TO BE CONCENTRIC WITH
AXIS WITHIN 0.02
5. ALL RADII ARE 4MM, AS STATED,
6. ALL EDGES / CORNERS ARE TO BE CHAMFERED

HARDNESS 195-215 HV

HARDENED & TEMPERED

(*) TEST CERTIFICATE REQUIRED:-

- MATERIAL & HARDNESS FROM NABL LAB.
- ULTRASONIC TEST REPORT FROM NABL LAB.

∇ [$\nabla \nabla$]