


Power LED / L 1245 mm - Transparent

Glass - Adjustable Optic - Medium Beam 45°



Light Source

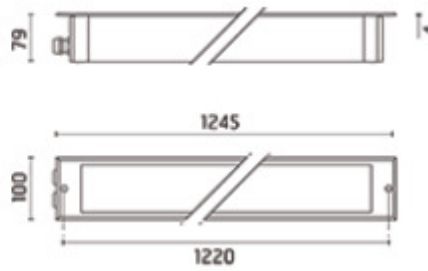

WARM WHITE 3000K POWER LEDs 26,4W/220÷240V

Total power 32W

LED lm 2880 ÷ OUTPUT lm 2303

CRI >80

Integral electronic power supply



Light Flux, Placement



Accessories



Box for installation
1435 x 95 H 95 mm



Frame for recessed installation on ceiling
1270 x 100 x H8 mm



SPD: (Surge Protection Device) 275Vac
Maximum discharge current 10KA (8/20µs)
Maximum operating current 5A
Suitable for series connection - IP66