
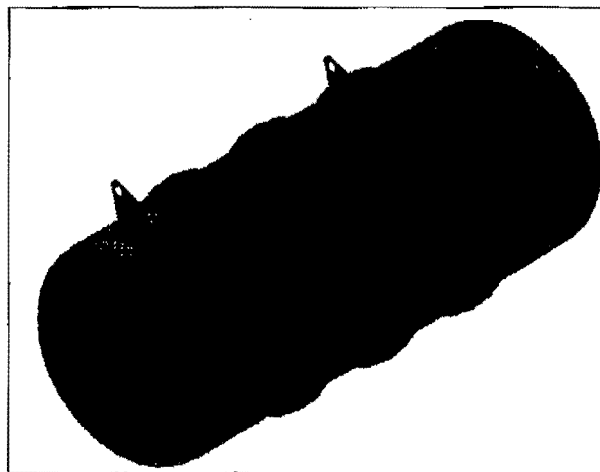
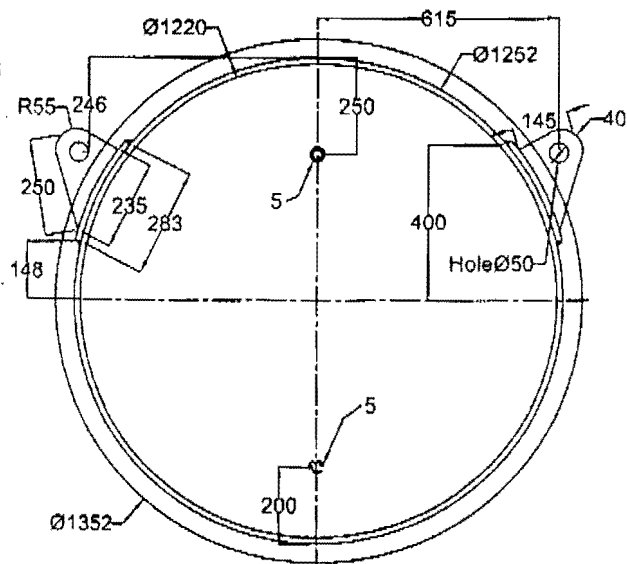



TRANSPORTATION AND STORAGE CYLINDERS (48X)

Sr. No.	Description	Quantity Required
01.	Transportation And Storage Cylinders (48X)	10 Nos.
	Material Of Construction: Steel ASTM A-516	
	Nominal Diameter: 48 inch (122 cm)	
	Nominal Length: 119 inch (302 cm)	
	Wall thickness: 5/8 inch (1.6cm)	
	Nominal tare weight: 4500lb (2041 kg)	
	Nominal gross weight: 25530Lb (11580 kg)	
	Minimum Volume: 108.90 Ft ³	
	Service Pressure: 200psig (1380kPa gauge)	
	Hydrostatic test pressure: 400psig (2760Kpa gauge)	
	Spindle valve Connection size: 1inch	
	Detailed: Drawing attached	

Annexure-B

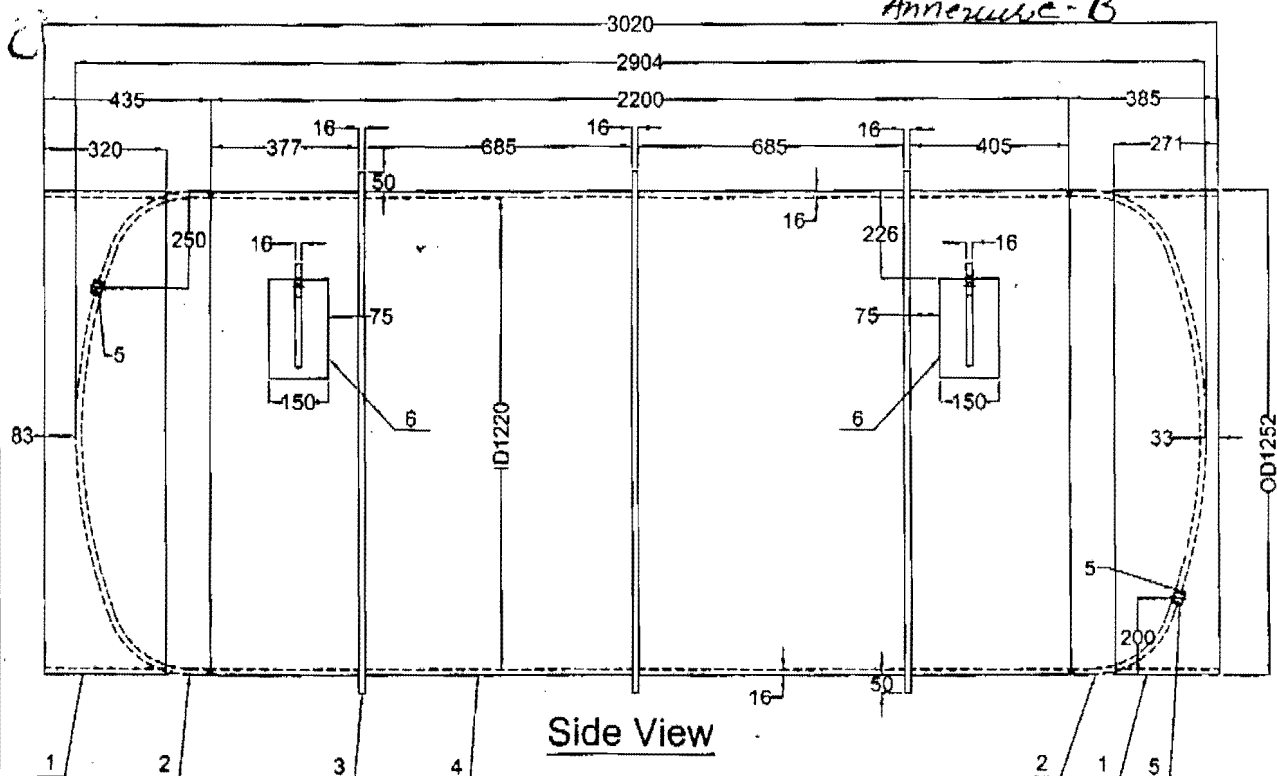

Cylinder Coupling
Threads 11 TPI BSW 55"



Sr.No.	Description	Qty (Nos.)
1	Skirt	02
2	Dish End (Semi Ellipsoidal Head)	02
3	Stiffening Ring	03
4	Shell	01
5	Cylinder Coupling (Socket Ø1")	02
6	Lifting Hook	04

Material:-

Steel (ASTM A-516)

48X Cylinder

Dimensions:-

mm