


FIG.1

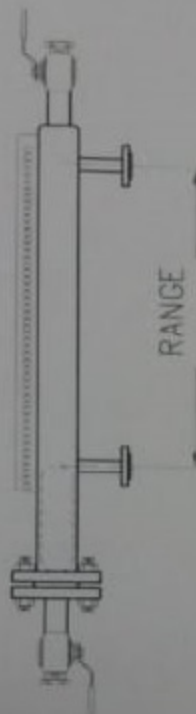


Configuration:

Process: SIDE MOUNT DN 3/4" ANSI 150# RF
Vent: 3/4" NPT BALL VALVE 800 Lb WITH PLUG - AISI 316
Drain: 3/4" NPT BALL VALVE 800 Lb WITH PLUG - AISI 316

<u>Rating</u>	<u>Design Pressure</u>	<u>Design Temperature</u>
ANSI 150#	As per datasheet	As per datasheet

<u>Material</u>	<u>Range</u>	
AISI 316L	As per datasheet	NACE MR 0175 Applicable

FIG.2

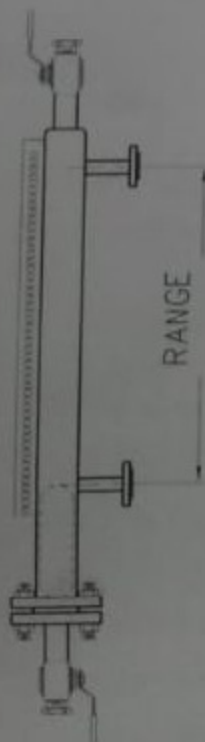

Configuration:

Process: SIDE MOUNT DN 3/4" ANSI 600# RF
Vent: 3/4" NPT BALL VALVE 800 Lb WITH PLUG - AISI 316
Drain: 3/4" NPT BALL VALVE 800 Lb WITH PLUG - AISI 316

<u>Rating</u>	<u>Design Pressure</u>	<u>Design Temperature</u>
ANSI 600#	1000 psig	220 °F

<u>Material</u>	<u>Range</u>	
AISI 316L	As per datasheet	NACE MR 0175 Applicable