

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC
DW

P LTR

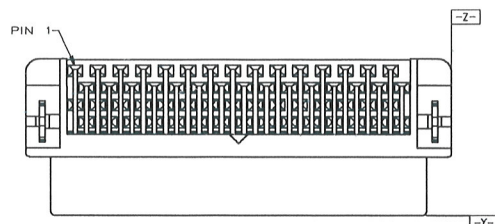
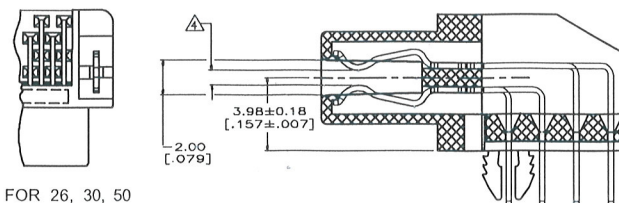
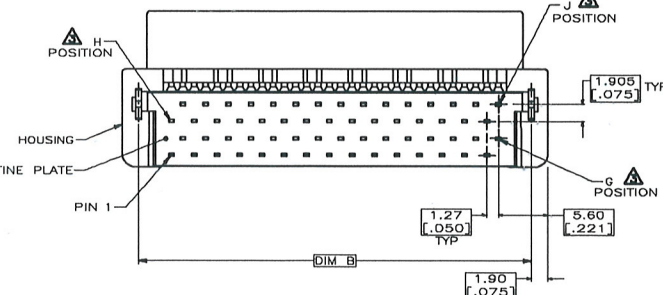

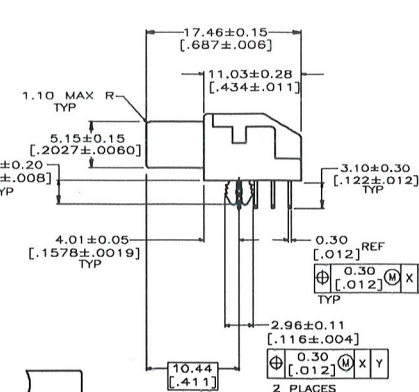
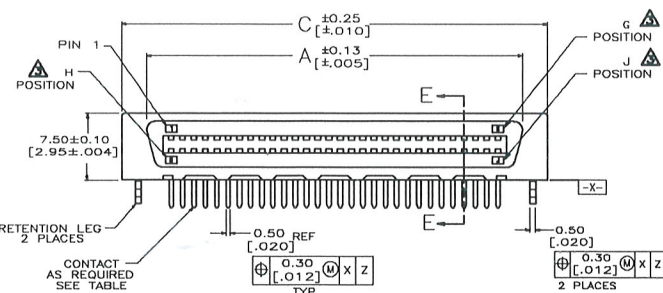
REVISIONS

DESCRIPTION

DATE

DWN

APVD

FOR 20, 40, 60, 68, 80, 100, 120
POSITIONS ONLYFOR 26, 30, 50
POSITIONS ONLYSECTION E-E
SCALE 2:1

NOTE:

- MATERIAL:
HOUSING: LIQUID CRYSTAL POLYMER (LCP), UL 94V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
BOARDLOCKS: BRASS.(Phosphor bronze)
- FINISH:
CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA,
3.81μm [150μ"] MIN. MATTE-TIN ON SOLDER TAIL, OVER
1.27mm [50m"] MIN. NICKEL UNDERPLATED.
BOARDLOCKS: 3.81μm [150μ"] MIN. TIN-Cu OVER
1.27mm [50m"] MIN. UNDERPLATED.
- G, J, AND H INDICATES NUMBER OF POSITION MARKED ON ASSEMBLY.
ALSO SEE TABLE.
- CONNECTOR SOLDER TAILS WILL ACCOMMODATE PRINTED CIRCUIT BOARD
THICKNESS OF 0.80 TO 1.60 [.031 TO .063].
- WAVE SOLDER CAPABLE TO 265°C PER TEST SPEC.
109-202, CONDITION B.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC [产品规格]

ZT01-SM***R/A-03

APPLICATION SPEC [适用规范]

AMP MOLEX

WEIGHT

CUSTOMER DRAWING

深圳市思大电子有限公司

RECEPTACLE ASSEMBLY, R/A, BTB, ZT01 SERIES
1.27系列全塑型SCSI插座[母头], R/A

1.27系列全塑型SCSI插座[母头], R/A

1.27系列全塑型SCSI插座[母头], R/A

1.27系列全塑型SCSI插座[母头], R/A

1.27系列全塑型SCSI插座[母头], R/A

1.27系列全塑型SCSI插座[母头], R/A

1.27系列全塑型SCSI插座[母头], R/A

1.27系列全塑型SCSI插座[母头], R/A

1.27系列全塑型SCSI插座[母头], R/A

1.27系列全塑型SCSI插座[母头], R/A

1.27系列全塑型SCSI插座[母头], R/A

1.27系列全塑型SCSI插座[母头], R/A

76.63 [3.017]	86.13 [3.391]	82.33 [3.242]	80.47 [3.168]	60	120	61	0.381um[15u"]	SM120RA-05	120
							GOLD FLASH	SM120RA-01	
63.93 [2.517]	73.43 [2.891]	69.63 [2.742]	67.77 [2.668]	50	100	51	0.381um[15u"]	SM100RA-05	100
							GOLD FLASH	SM100RA-01	
51.23 [2.017]	60.73 [2.391]	56.93 [2.242]	55.07 [2.168]	40	80	41	0.381um[15u"]	SM080RA-05	80
							GOLD FLASH	SM080RA-01	
43.61 [1.717]	53.11 [2.091]	49.31 [1.941]	47.45 [1.868]	34	68	35	0.381um[15u"]	SM068RA-05	68
							GOLD FLASH	SM068RA-01	
	48.03 [1.891]	44.23 [1.742]	42.37 [1.668]	30	60	31	0.381um[15u"]	SM060RA-05	60
							GOLD FLASH	SM060RA-01	
							0.381um[15u"]	SM050RA-05	50
							GOLD FLASH	SM050RA-01	
							0.381um[15u"]	SM040RA-05	40
							GOLD FLASH	SM040RA-01	
							0.381um[15u"]	SM030RA-05	30
							GOLD FLASH	SM030RA-01	
							0.381um[15u"]	SM028RA-05	26
							GOLD FLASH	SM028RA-01	
							0.381um[15u"]	SM020RA-05	20
							GOLD FLASH	SM020RA-01	
							GOLD PLAIED	PARI NUMBER	POS.

DIMENSIONS:

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±0.3

2 PLC ±0.2

3 PLC ±

4 PLC ±

ANGLES ±3'

FINISH

SEE NOTE

SEE NOTE

SEE NOTE

SEE NOTE

SEE NOTE

MATERIAL

SEE NOTE

FINISH

SEE NOTE

MATERIAL

SEE NOTE

FINISH

SEE NOTE

SIZE

A4

A4

A4

A4

A4

A4

A4

A4

CAGE CODE

ZT01-000RA

ZT01-000RA

ZT01-000RA

ZT01-000RA

ZT01-000RA

ZT01-000RA

ZT01-000RA

ZT01-000RA

DRAWING NO

D-ZTEC-01002

D-ZTEC-01002

D-ZTEC-01002

D-ZTEC-01002

D-ZTEC-01002

D-ZTEC-01002

D-ZTEC-01002

D-ZTEC-01002

RESTRICTED TO

G1

G1

G1

G1

G1

G1

G1

G1