

TECHNICAL SPECIFICATIONS

Load	Throat	height A	length	Time	spread Z	dimensions*	Centre of gravity	Self weight**
capacity (kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
1500	1050 - 1650	980	475 - 815	80 x 35	500	150		
2000	1050 - 1650	980	495 - 835	100 x 35	500	175		
2500	1050 - 1650	980	490 - 830	90 x 40	500	230		
1500	1050 - 1650	1150	495 - 835	100 x 35	600	180		
2000	1050 - 1650	1150	500 - 840	90 x 40	600	230		
2500	1050 - 1650	1150	510 - 850	100 x 45	600	250		
** weight without rotator and protection chain								


DELIVERY: Pallet fork with protection chain PZP-SK
 Protection trellis or net is mandatory for loose material (EN 13155).
 Pallet packages with flange rotators are listed on page 14.

SERIES

Description	
Recommended flange rotator	- load capacity 4500 kg
Shaft rotator - load capacity 4500 kg	S-X*
Quick change system for shaft rotators	S-PK
Reduction link between rotator and grapple	R-XX*
Non-rotating hook for shaft rotators	N-XX*
Extension of the effective height by 750 mm up to 2 t, time length 980 mm	
Extension of the effective height by 750 mm from 2 t, time length 1150 mm	
* Shaft when ordering	

NAME REQUIREMENTS

Pressure: max. 200 bar
 Rotation: 200 bar
 Capacity: 20 - 40 l/min
 Functions on the crane

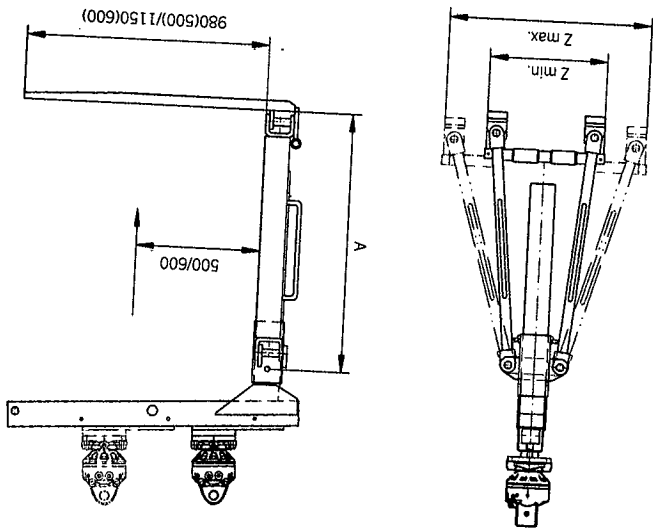

TECHNICAL DRAWING