




GE  
Lighting

## 14496 - F40CW/U/6/EX

GE Cool White Mod-U-line® T12

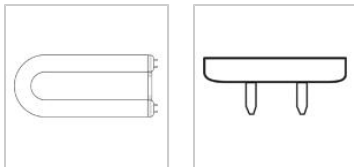

### CAUTIONS & WARNINGS

#### Caution


- Improper handling may cause breakage.
  - Do not carry lamp by bracket.
- Lamp may shatter and cause injury if broken
  - Wear safety glasses and gloves when handling lamp.
  - Do not use excessive force when installing lamp.

#### Warning


- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.

### GRAPHS & CHARTS

#### Graphs\_Spectral Power Distribution

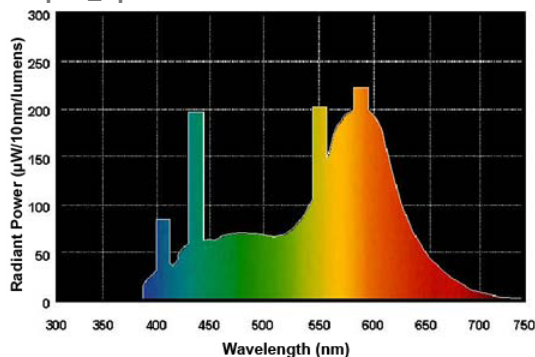

#### Graphs\_Lamp Mortality

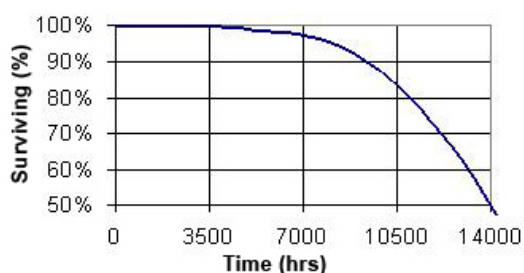

### GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - U-Shaped
Bulb	T12
Base	Medium Bi-Pin (G13)
Rated Life (NOM)	14000.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	30.0 mg
Picograms of Mercury (NOM)	871.1 pg

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	2800.0
Mean Lumens (NOM)	2460.0
Nominal Initial Lumens per Watt (NOM)	70.0
Color Temperature (NOM)	4100.0 K
Color Rendering Index (CRI) (NOM)	60.0

### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	40.0
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	22.500 in(571.5 mm)
Minimum Overall Length (NOM)	22.250 in(565.2 mm)
Nominal Length (NOM)	22.500 in(571.5 mm)
Bulb Diameter (DIA) (NOM)	1.500 in(38.1 mm)
Bulb Diameter in Bend (MIN)	1.330 in(33.8 mm)
Bulb Diameter in Bend (MAX)	1.630 in(41.4 mm)
Bulb Diameter in Legs (MIN)	1.410 in(35.8 mm)
Bulb Diameter in Legs (MAX)	1.590 in(40.4 mm)
Base Face to Top of Lamp (NOM)	22.250 in(565.2 mm)
Lamp Legs Center to Center Length (NOM)	6.000 in(152.4 mm)

### PRODUCT INFORMATION

Product Code	14496
Description	F40CW/U/6/EX
ANSI Code	78901-ANSI-4029-1
Standard Package	Case
Standard Package GTIN	
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	12
Package	
UPC	

