



Sr#	DESCRIPTION	QTY Nos.
1.	<b><u>SINTERED METAL CARTRIDGE FILTERS</u></b>	<b>35</b>
	<ul style="list-style-type: none"> <li>• <b>Material of Construction:</b> Inconel-600</li> <li>• <b>Length:</b> 500mm (See drawing attached)</li> <li>• <b>Outer diameter:</b> 70mm</li> <li>• <b>Wall thickness:</b> 5mm</li> <li>• <b>End connection:</b> 1NPT(Male)</li> <li>• <b>Proe size:</b> 1<math>\mu</math>m</li> <li>• <b>%void (filtration area per filter):</b> 50%</li> <li>• <b>Working Temperature:</b> 300 °C</li> <li>• <b>Working Pressure:</b> 4 bar</li> <li>• <b>Direction of fluid flow:</b> From outside to inside for process fluid and from inside to outside for back-blow.</li> <li>• <b>Make:</b> imported.</li> </ul>	

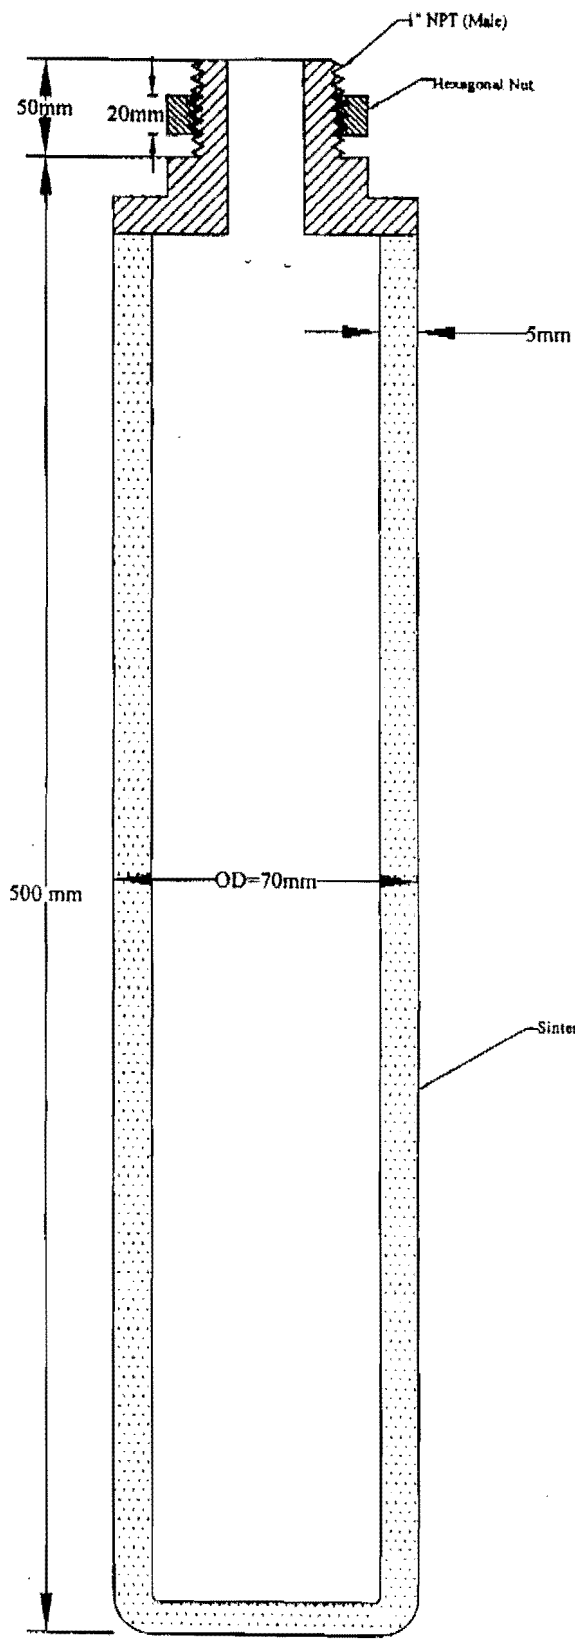

Top View

NOTES:

Material of Construction of all parts= Inconel-600

Sintered Metal Cartridge Filter