
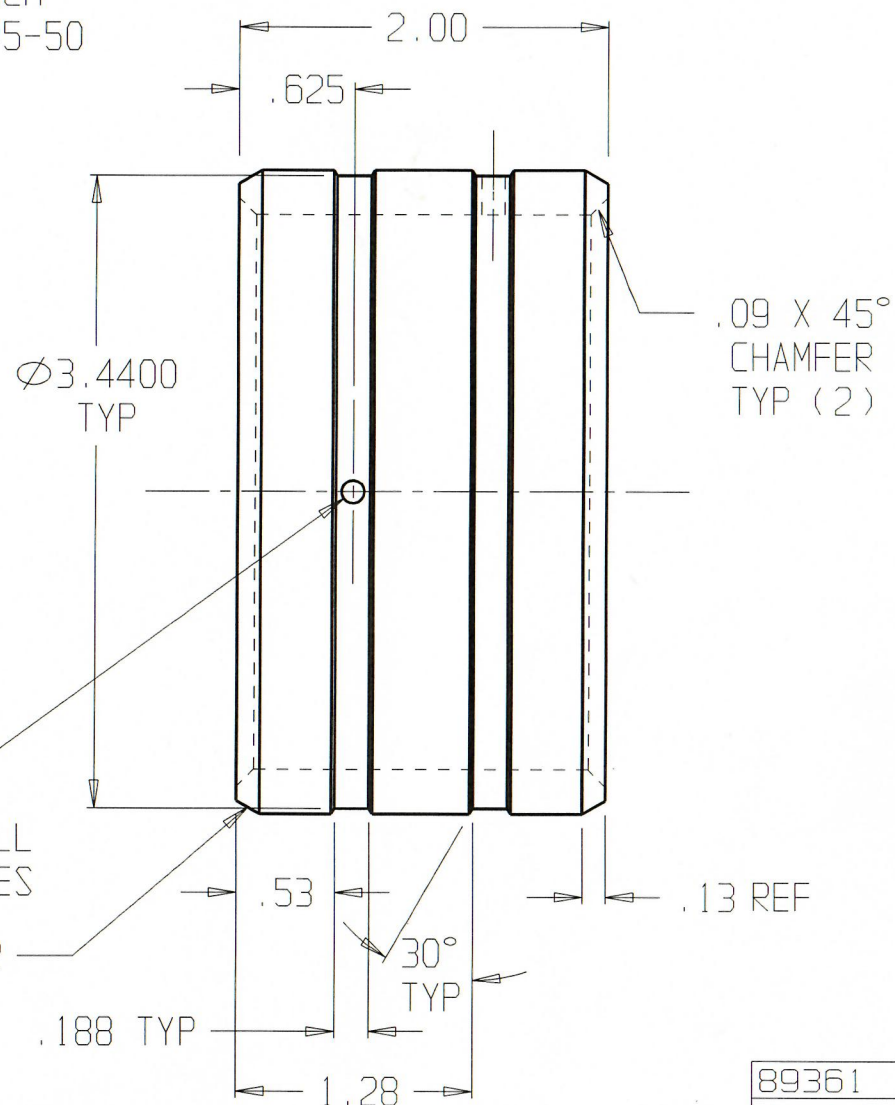


ITEM	QTY.	PART NO.
*	*	*****

HEAT TREATMENT: 油淬火, 热处理HRC45~50
THRU-HARDEN AND OIL QUENCH
TEMPER TO ROCKWELL 'C' 45-50

PART NO.
89436

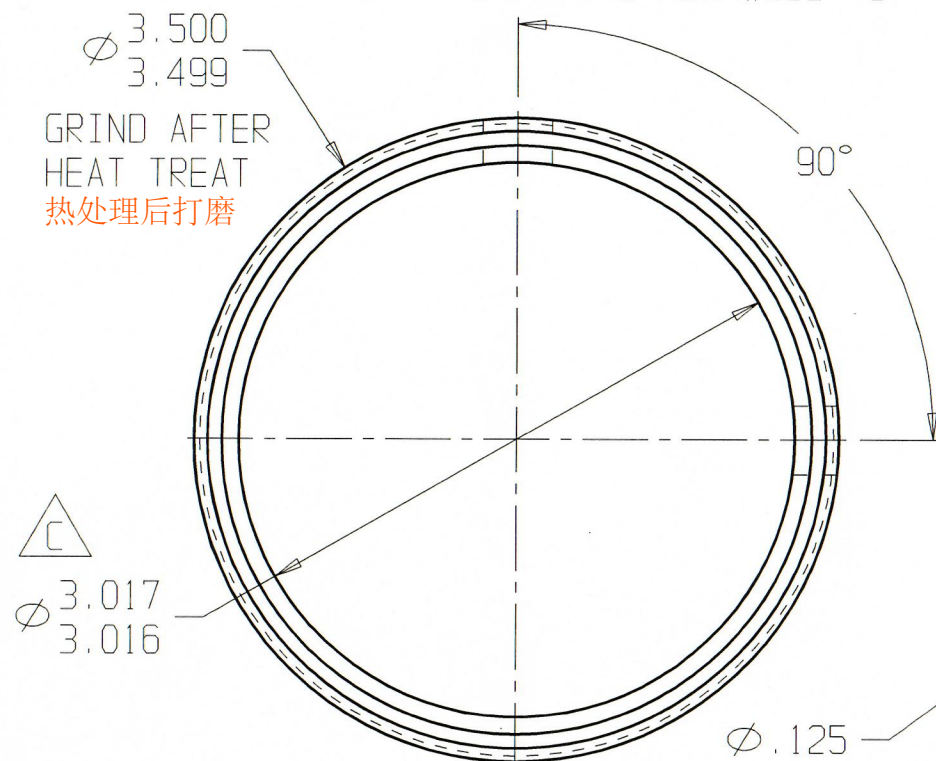

TOLERANCE
DECIMAL
.XX +/- .06
.XXX +/- .030
.XXXX +/- .0100
ANGULAR
+/- 1 DEG.
UNLESS
OTHERWISE
SPECIFIED

FAB	

DISTRIBUTION

REF. NO. 86673

D					
C	ID WAS 3.016	05/06/03	PRS		
B	HOLES WAS .375 (1) HOLE	03/27/03	PRS	DRAWN	DATE
B	ADD CHMFR, GROOVES, .125 (2)	03/27/03	PRS	JAI	01/08/01
A	RELEASE FOR PRODUCTION	02/28/01	JAI	CHECKED	DATE
REV.	DESCRIPTION	DATE	BY	PRS	03/27/03

TITLE: BUSHING

FIRST USE PRODUCT: DOZER BLADE

MAT'L: 3.50 DIA. CR AISI 4140

SCALE 1:1
DO NOT SCALE DWG.
DEBURR PART

PART NO.
89436

89361
FIRST USED