
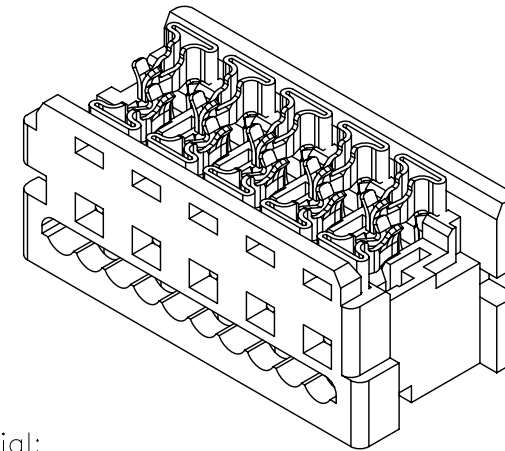



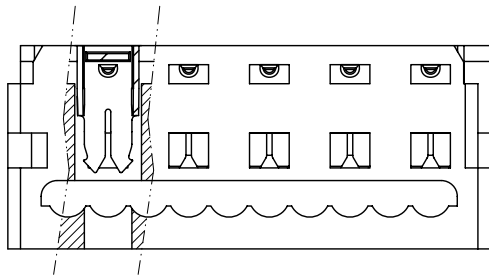

Material:

* Insulation:

Base: Glass Filled Polyester UL 94V-0

* Contact: Phosphor Bronze

Ordering Code:

CA33 ** P 1 0 I 0 -NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.:

② No. of Circuits: 04 to 26

③ Contacts Type: P= Pin Header

④ Plating option:

1= 30u" Min. Tin Plated



(Reflow Plated)

⑤ Color: 0= Nature

⑥ Type: I= IDC Type

⑦ Option: 0= Standard (Tube Packing)

⑧ NH= Halogen-Free

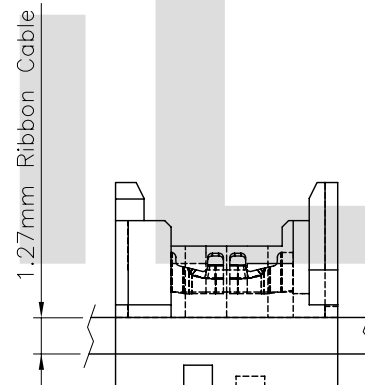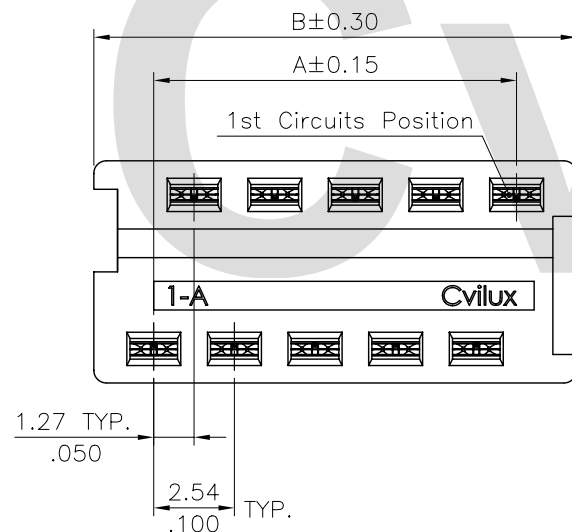

DIM.A= 1.27 x No. of Spaces

DIM.B= DIM.A + 3.78

*Available in 4 ~ 26 Circuits

Halogen-Free

RoHS compliant

4
3
2
1

CVILUX CORP
2010.02.09
ISSUED

DRAWN BY:
ENGINEER:
CHECKED BY:
APPROVED BY:

Clark
Clark
Eisley
David

DATE
1/15-10'
1/18-10'
1/22-10'
1/22-10'

UNIT: mm / inch
TOLERANCE
UNLESS OTHERWISE SPECIFIED
.X ± 0.30/.012
.XX ± 0.20/.008
.XXX ± 0.10/.004
X' ± 1'
.X' ±
.XX' ±

TITLE: 1.27mm Pitch
IDC Type Connector
MATERIAL:
FINISH:



瀚荃股份有限公司
CviLux Corporation

DRAWING NO. CA3301SA PART NO. CA33**P10I0-NH
SCALE 4 / 1 SHEET 1 OF 1