ASSEMBLY P/N	LENGTH (METERS)	TOLERANCE (METERS)
1064152101	1.0	+0.2/-0.0
1064152103	3.0	+0.2/-0.0
1064152105	5.0	+0.25/-0.0
1064152106	6.0	+0.25/-0.0
1064152107	7.0	+0.25/-0.0
1064152108	8.0	+0.25/-0.0
1064152110	10.0	+0.30/-0.0
1064152115	15.0	+0.30/-0.0
1064152120	20.0	+0.40/-0.0
1064152130	30.0	+0.60/-0.0
1064152150	50.0	+1.00/-0.0
1064152199	100.0	+2.00/-0.0

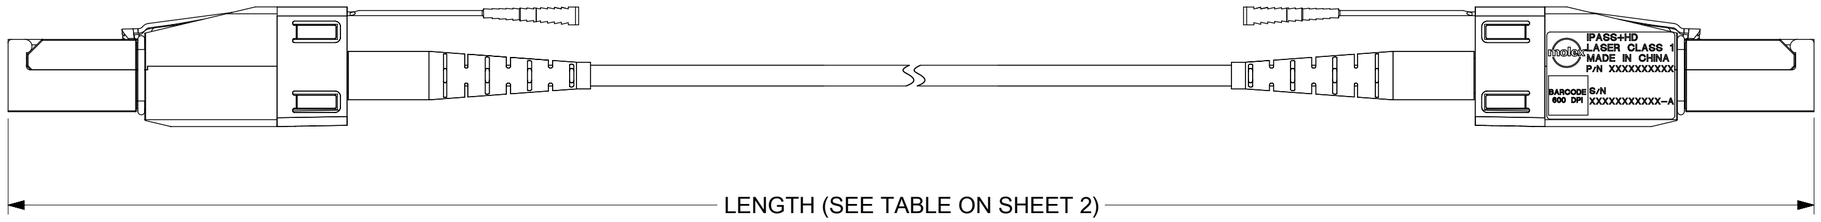

JUMPER VIEW
SCALE 1.5:1

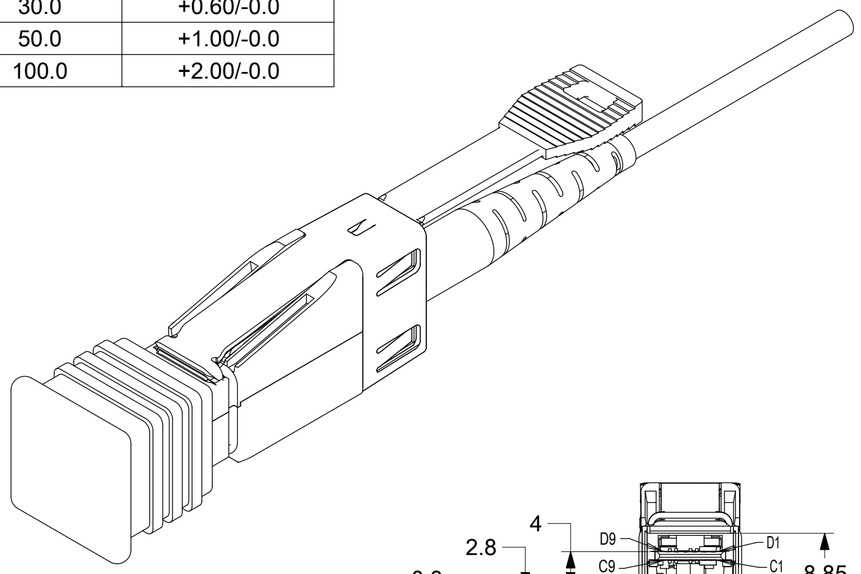

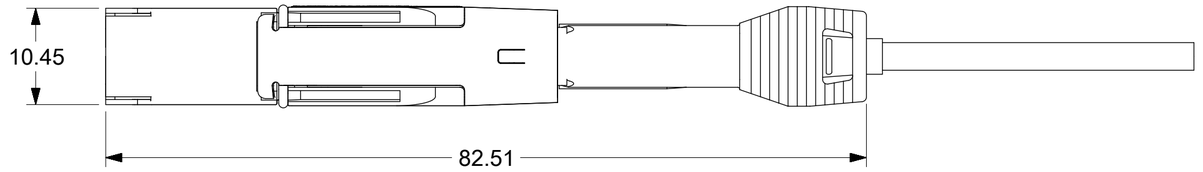

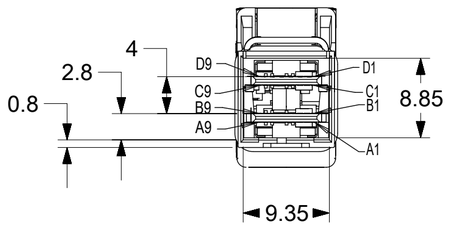

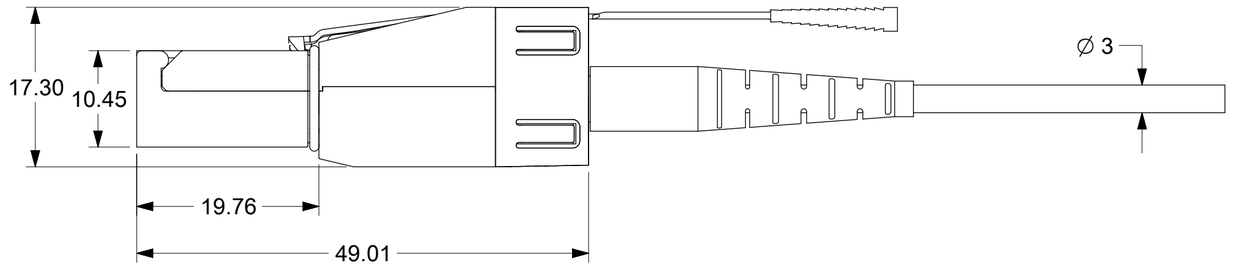



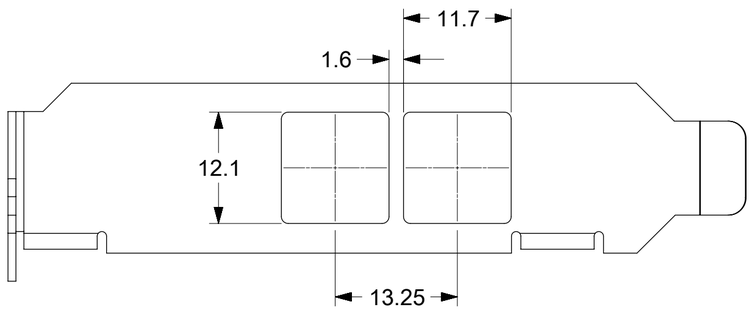

SHIELDED INTEGRATED HD CONNECTOR MINIMUM PITCH

SCALE 2:1

NOTES:
1. MATERIALS=
BACKSHELLS - ZINC DIECAST WITH NICKEL PLATING.
LATCH - STAINLESS STEEL.
PULL - MOLDED PLASTIC, 279C (BLUE)

2. CABLE TYPE PLENUM (OFNP) WITH 8 MULTIMODE FIBERS, MINIMUM BEND RADIUS 25mm, FIBER CORE 50/125um OM3, CABLE JACKET COLOR-AQUA, DIAMETER 3.2mm MAX.

3. ELECTRICAL AND MECHANICALS PER SFF-8644 AND SFF-8636

4. PLUG MATES TO 1X1, 1X2 AND 1X4 RECEPTACLE - EMI HOUSING ASSEMBLY SERIES.

5. THIS PRODUCT MEETS THE RESTRICTION OF HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (RoHS) DIRECTIVE (2002/95/EC).

QUALITY SYMBOLS	
FA	= 0
FC	= 0
FP	= 0
▼	= 0
C	= 0
☒	= 0
■	= 0
▽	= 0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 107987 2016/08/30
DRWN: MAGHAYERE01 2016/09/01
CHK'D:
APPR: IGUMIN
REV A1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ±	°
4 PLACES	±
3 PLACES	±
2 PLACES	±
1 PLACE	±
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION UNITS: MM
SCALE: 1:1
DRWN BY: MAGHAYERE01 DATE: 2016/03/04
CHK'D BY: DATE:
APP'R BY: IGUMIN DATE: 2016/03/16
DRAWING SIZE: C
THIRD ANGLE PROJECTION

molex

IPASS+ HD AOC, S-TYPE

PRODUCT CUSTOMER DRAWING

SERIES	MATERIAL NUMBER	CUSTOMER
106415	SEE TABLE	

DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
1064152105	PSD	000	1 OF 1

RELEASE STATUS	P1	RELEASE DATE	01.09.2016 20:16:02

FORMAT: master-lib-prod-C
REVISION: F
DATE: 2015/11/16