


60 AMP SERIES

660V-1100V

UPDATED JANUARY 2019

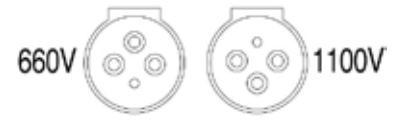

RESTRAINED PLUG INTEGRAL GLAND

AF664R - AF614R

ORDER PROCEDURE

- 1 Select complete Plug from Table 1
- 2 Select Phase Thimble from Table 2 (3 Required)
- 3 Select Grommet from Table 3

Table 1

Part Number	Description	Colour
AF664R	660V Restrained Plug	Orange
AF614R	1100V Restrained Plug	Blue

NB: Plug supplied with Pilot Thimble

Table 2

Phase Thimble - c/w screw AH009006 6-32 x 3/8" skt. head

Part Number	CSA	ID mm	Utilux Die No.
F-3758	2.5	3.0	38-44 Cu
F-3758-1	6	3.7	38-44 Cu
F-3758-2	10	4.7	38-57 Cu
F-3758-3	16	5.5	38-63 Cu
F-3758-4	25	7.1	38-77 Cu

NB: CSA is indicative only. Use ID for thimble selection


Table 3

Neoprene Grommets

Part Number	Cable Acceptance mm
89197-13	9.0-13.0
89197-16	12.0-16.0
89197-19	15.0-19.0
89197-22	18.0-22.0
89197-25	21.0-25.0
89197-29	24.0-29.0
89197-32	28.0-32.0
89197-35	31.0-35.0
89197-37	34.0-37.0

Spare Parts

#	Part Number	Description
1A	F-4078-664	660V Plug Body c/w items 1A, 5 & 11
1B	F-4078-614	1100V Plug Body c/w items 1B, 5 & 11
2	4080SS	Earth Sleeve
3	F-4082-1	Interior c/w Earth Thimble, Earth Ring, Strap, Screw & Washer
4	See Table 3	Neoprene Grommet
5	89207-2B	Clamping Cap
6	F-420L	Protection Cap
7	See Table 2	Phase or Pilot Thimble
8	F-3759	Phase or Pilot Socket
9	AH009006	Screw 6-32 x 3/8" skt. head
10	F-4650	Earth Thimble c/w screw AH151035 M3 x 10 csk. head
11	AH113096	Screw M8 x 30 hex. head

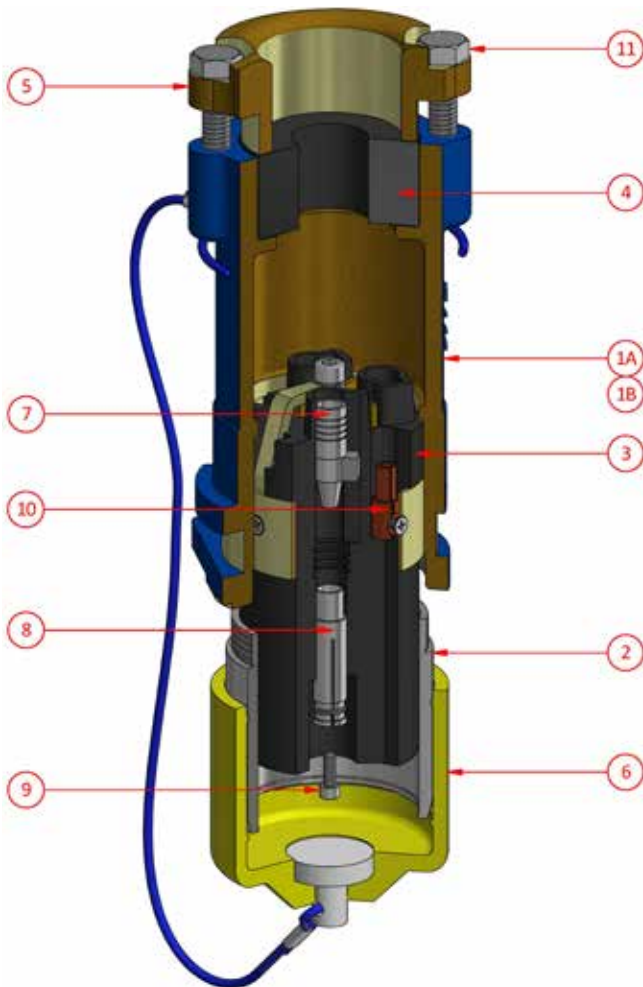

Weight
Dimensions
Compliance
Materials
IP Rating

3kg
L 130mm W 130mm H 270mm
Explosion protected to AS/NZS1299 & IEC60079 Series
Manganese Bronze / Neoprene / Stainless Steel
IP66/68