



REV.	DESCRIPTION OF REVISION	DATE	ZONE REF.	REV. BY


6.5⁰_{-0.36}

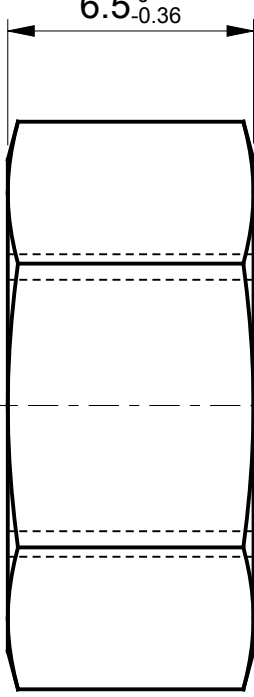

13⁰_{-0.27} A/F HEX

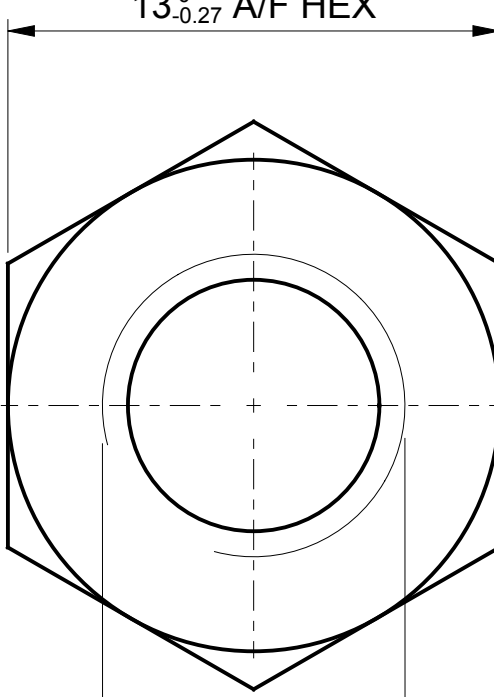

M8x1p -6H

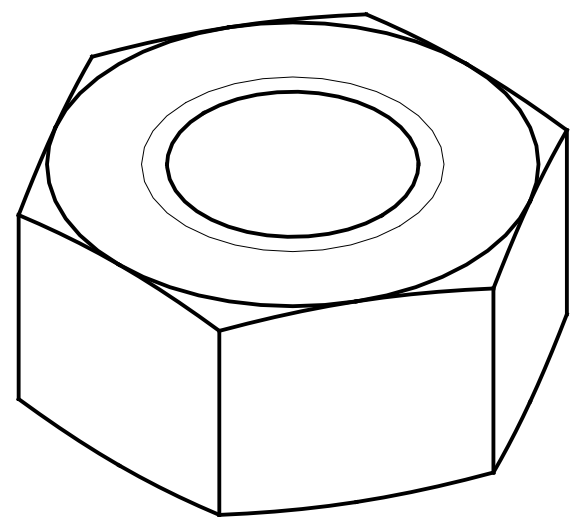


4 ✓

NOTE

1. SHARP EDGES BROKEN MAX 0.2X45°.

2. FILLET RADII 0.4 MM UNLESS OTHERWISE INDICATED.

General Tolerances SS-ISO 2768-1-m and/or SS-EN ISO 13920-B		Material SS-EN 10083-1-34CrNiMo6-TQ+T	Surface treatment -	Dimension -	Scale 5:1
		Reference art.nr. -	Reference -	Replaces -	Sheet 1(1)
	Y	Designer CJn	Date 2011-02-15	Article/Mdl.nr 1002382	Mdl.Ver. 1.5
Description NUT			Document id 1002384	Article/Mdl. status Production	Doc.Ver. 1.10