


Subject: **Quotation for “RFI GASKET”**

We intend to purchase goods as detailed below.


Sr. No.	Item / Description	Part No.	Quantity
1.	Double Round Mesh Gasket With Neoprene Sponge Elastomer Core wrapped with two layers of TCS Make: Tech Etch, INC, USA	2040-1011-0067	4724 Meter

2000 Series Wire Mesh Elastomer Core

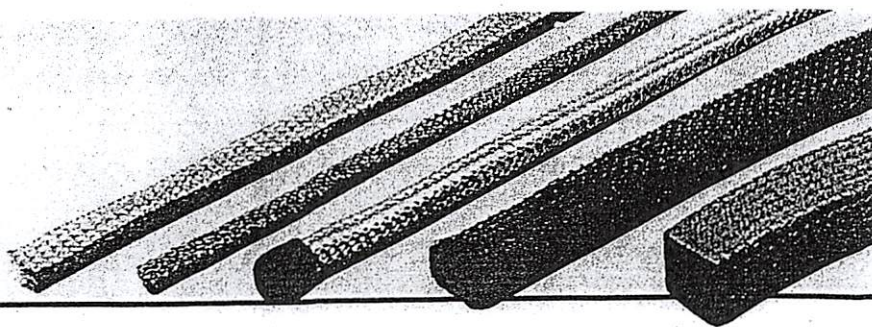

NOTE: Standard cross-sectional dimensions given are those of the elastomer and due allowance must be made for mesh thickness.


Rectangular



H (in.)	W (in.)	Part Number
.062	.250	201T - YNZA - 0016
.093	.125	201T - YNZA - 0006
.125	.125	201T - YNZA - 0007
.125	.156	201T - YNZA - 0008
.125	.188	201T - YNZA - 0009
.125	.250	201T - YNZA - 0010
.188	.188	201T - YNZA - 0013
.188	.250	201T - YNZA - 0005
.250	.250	201T - YNZA - 0018
.250	.500	201T - YNZA - 0020
.375	.250	201T - YNZA - 0019
.375	.500	201T - YNZA - 0022
.375	.625	201T - YNZA - 0023
.500	.500	201T - YNZA - 0024
.750	.500	201T - YNZA - 0025

Tolerances for Elastomer: Up to .0375, ± 0.031 in.; over 0.375 to 0.750, ± 0.062 in.


Round



D (Core) (in.)	ID (Tube) (in.)	Part Number
.062	.032	202T - YNZO - 0026
.093		202T - YNZO - 0027
.125	.062	202T - YNZO - 0028
.156		202T - YNZO - 0029
.188	.125	202T - YNZO - 0030
.250	.170	202T - YNZO - 0031
.312	.188	202T - YNZO - 0032
.375	.250	202T - YNZO - 0033
.437	.312	202T - YNZO - 0034
.500	.375	202T - YNZO - 0035
.625	.437	202T - YNZO - 0036
.750		202T - YNZO - 0037

Tolerances for Elastomer: Up to 0.500 dia., ± 0.031 in.; over 0.500 dia., ± 0.047 in.


Round With Tail



D (Core) (in.)	W (O/A) (in.)	Part Number
.125	.500	203T - YNZA - 0045
.125	.625	203T - YNZA - 0046
.125	.750	203T - YNZA - 0047
.188	.500	203T - YNZA - 0048
.188	.750	203T - YNZA - 0050
.188	1.250	203T - YNZA - 0055
.250	.500	203T - YNZA - 0051
.250	.625	203T - YNZA - 0052
.250	.750	203T - YNZA - 0053
.250	1.000	203T - YNZA - 0054

Tolerances for Width: Up to 1.00 in., ± 0.062 in.; over 1.00 in., ± 0.12 in.

D



H (Core) (in.)	W (Core) (in.)	Part Number
.188	.250	206T - YNZA - 0010
.250	.375	206T - YNZA - 0020
.375	.500	206T - YNZA - 0030

Tolerances for Elastomer ± 0.031 in.

Note: Round With Tail also available as **Double Round With Tail**. Order as 2040-YNZA-XXXX. For Width (W) and Depth (D), use sequential numbers from Mesh Core Double Round With Tail on page 33.

How To Order

2000 Series - Elastomer Core

Example: Part number 2020-2060-0028 a continuous roll of 0.125" diameter silicone tubing covered with two layers of monel mesh with no adhesive. Unless standard, the sequential number is assigned by the factory.

2040 1011 0067
20XT - YNZA - XXXX - LLL

2000
SERIES

SEQUENTIAL
(XXXX)

LENGTH
(LL.LL")
Length
of Cut
Gaskets
(Condition
1, 2 or 3
Only)

ADHESIVE (A)

- 0 No Adhesive
- 1 Pressure Sensitive

ELASTOMER CORE (Z)

- 1 Neoprene Sponge
- 2 Neoprene Solid
- 3 Neoprene Hollow
- 4 Silicone Sponge
- 5 Silicone Solid
- 6 Silicone Hollow
- 7 Neoprene Sponge (UL94V-0)
- 8 Polyurethane Foam

NUMBER OF COVERS (N)

- 1 One 3 Three 5 Other
- 0 Two* 4 Four *Standard

WIRE (Y)

- 1 TCS 3 Aluminum 5 Other
- 2 Monel 4 Stainless Steel

CONDITION (T)

- 0 Continuous Roll 3** Joined Ring Cut To Length
- 1* Cut To Length With End Seal 5 Other
- 2* Cut To Length Without End Seal

*Length in inches to be specified following the sequential number

**Circumference in inches to be specified following the sequential number

CONFIGURATION (X)

- 1 Rectangular 4 Double Round W/Tail
- 2 Round 6 D Shape
- 3 Round W/Tail

For material specifications and performance data see page 32.

FOR SIZES NOT SHOWN, PLEASE ASK!