



SS SEAMLESS SINTERED FILTER CARTRIDGES

Sr#	Description	Qty
1	<u>SS Seamless Sintered Filter Cartridges with Adopter</u> <ul style="list-style-type: none">• Filter Cartridges SP Series Model: SPK07-24ST• Manufacturer: ASCO FILTRI S.p.A, Italy or equivalent• Filter Media:<ul style="list-style-type: none">○ Porous: SS 316L○ Hardware: SS 316L○ Filtration Class 07○ Adopter OD 33mm, ID 26mm○ Filtration Area: 950 cm²• Max working Temp: 480°C (in reducing atmosphere)• Max. Differential Pressure:<ul style="list-style-type: none">○ Out to In = 10 bar○ In to Out = 24 bar• Dia of Cartridge: 50 mm (outer) nominal• Dia of Cartridge: 44 mm (inner) nominal• Length of Cartridge: 600 mm• Stopping Threshold: 15 micron• Please refer to the attached drawing for further details	24


REVISED DIA 33 x PITCH

11 -TPI

33

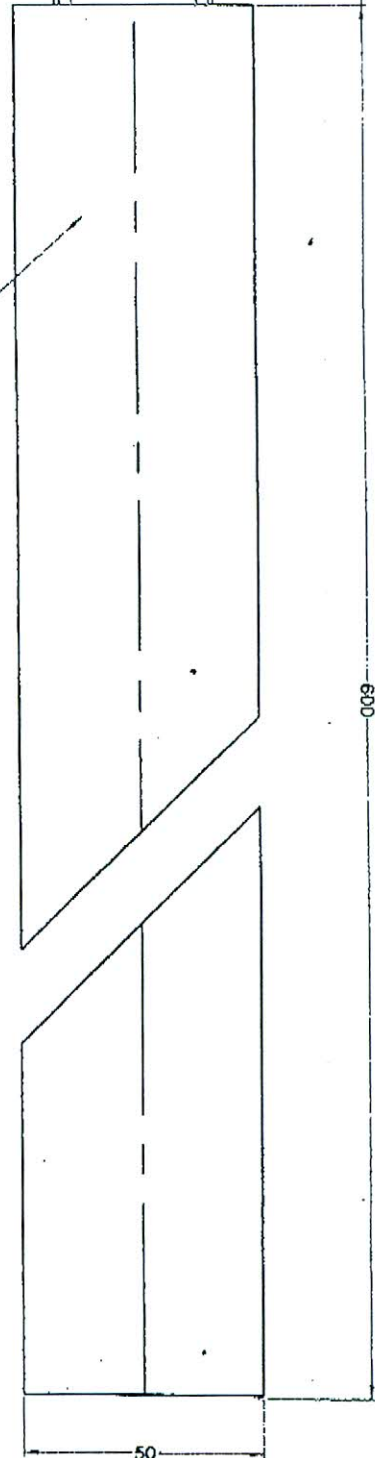

REVISED DIA-33 x PITCH
11 -TPI



SS SEAMLESS SINTERED FILTER CARTRIDGES

FILTER CARTRIDGE SP SERIES MOD SPK-07-24ST

FILTER MEDIA = POROUS 316-L SS

HARD WARE = 316 L SS

FILTRATION CLASS = 07

ADOPTER = OD 33, ID 26

FILTRING AREA = 950 cm²

MAX. WORKING TEMP = 480° C

MAX. DIFFERENTIAL PRESSURE=(OUT TO IN) 10 BAR (IN TO OUT) 24 BAR

Dia 50 mm,length of cartridge 600 mm

Stopping Thershold 15 micron