


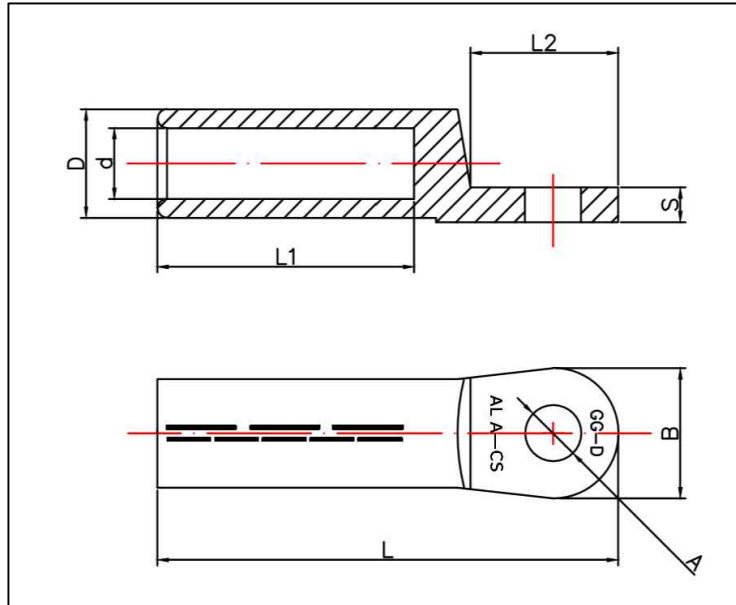

要求:

	1. 表面镀锡, 锡层厚度15 μm
	2. 铝材≥99.5%, 牌号1070
	3. 尺寸mm
	4. 管内含导电膏
	5. 塑料密封塞[红色]
	6. GG-D: "D"按规格表相应打标
	7. AL A-CS: "A""CS"按规格表相应打标
	8. 执行标准: DIN46329

Cat. No	Cross Sect	No. of Crimps		Nominal Dimensions-mm							
		Mec.	Hyd.	D±0.3	d±0.3	B±0.3	L1±2	L2±2	A±0.3	S±0.3	L±3
GG1216-8	16	4	2	12	5.8	20	29	22	8	3.5	62
GG1216-10	16	4	2	12	5.8	20	29	22	10	3.5	62
GG1225-8	25	4	2	14	6.8	25	29	25	8	4.2	62.5
GG1225-10	25	4	2	14	6.8	25	29	25	10	4.2	62.5
GG1235-8	35	5	2	14	8	25	41	25	8	4.2	74
GG1235-10	35	5	2	14	8	25	41	25	10	4.2	74
GG1235-13	35	5	2	14	8	25	41	25	13	4.2	74
GG1250-10	50	5	3	16	9.8	25	42	25	10	4.5	74
GG1250-13	50	5	3	16	9.8	25	42	25	13	4.5	74
GG1250-16	50	5	3	16	9.8	25	42	25	16	4.5	74
GG1270-10	70	6	3	18	11.5	25	51	25	10	5.5	85
GG1270-13	70	6	3	18	11.5	25	51	25	13	5.5	85
GG1295-10	95	6	3	22	13.2	25	55	28	10	6	90
GG1295-12	95	6	3	22	13.2	25	55	28	12	6	90
GG1295-17	95	6	3	22	13.2	25	55	28	17	6	90
GG12120-10	120	6	3	23	14.7	30	55	30	10	7.5	96
GG12120-13	120	6	3	23	14.7	30	55	30	13	7.5	96
GG12120-16	120	6	3	23	14.7	30	55	30	16	7.5	96
GG12150-12	150	6	3	25	16.3	30	59	34	12	8	106
GG12150-16	150	6	3	25	16.3	30	59	34	16	8	106
GG12185-12	185	0	3	28	18.3	30	59	34	12	8	108
GG12185-16	185	0	3	28	18.3	30	59	34	16	8	108
GG12240-12	240	0	3	32	21	38	69	42	12	11	128
GG12240-16	240	0	3	32	21	38	69	42	16	11	128
GG12300-13	300	0	3	34	23.5	38	69	42	13	12	130
GG12300-16	300	0	3	34	23.5	38	69	42	16	12	130

REV.	DESCRIPTION	COMPILED	APPROVED	DATE
0				
GENERAL TOLERANCE UNLESS OTHERWISE STATED 0 to 1000 ±10 1001 to 2000 ±15 2001 to 4000 ±20		鑫源易网(大连)电力科技有限公司		
SCALE 1:1		型号见表格		
PAGE 1 OF 1		DWG NO.: 0407030420- Ø5~30		
MODEL:		REV. 0		

ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE STATED

I.S.O. SIZE A4 210mm x 297mm